

E4080

SP180


SOIL DISPLACEMENT KIT



E4080

SP180

SOIL DISPLACEMENT KIT

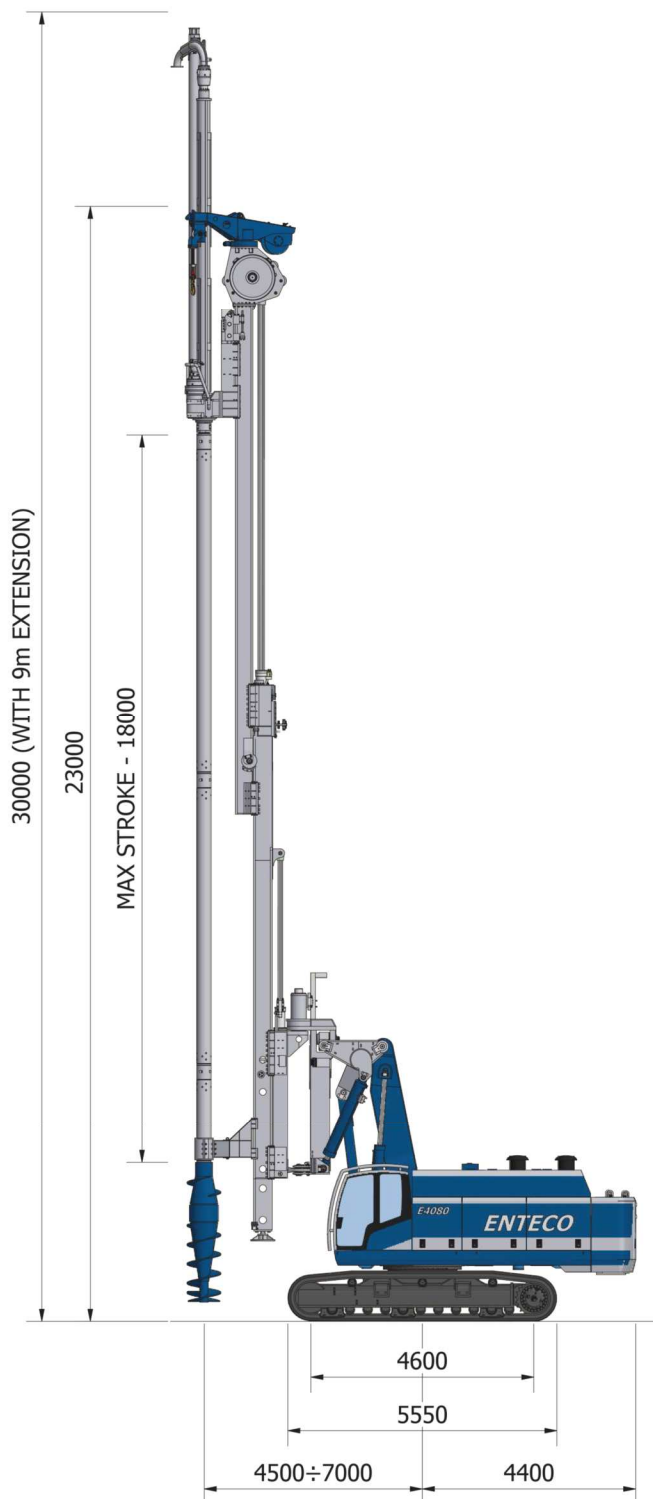

E4080 - SP180 SOIL DISPLACEMENT KIT

OPERATING WEIGHT	ton	up to 80
Drilling diameter	mm	320÷800
Max drilling depth	m	28

TELESCOPIC MAST

Mast front inclination	degrees	4°
Mast rear inclination	degrees	15°
Mast lateral inclination	degrees	±5°
Carriage stroke	mm	18000
Crowd force	kN	300
Extraction force	kN	300

ROTARY

Model	ENTECO R180	
Max torque	kNm	180
Max drilling speed	rpm	55
Kelly extension	m	3, 7, 9, 12

E4080 - BASE MACHINE

CRAWLERS


Overall width	mm	3000÷4500
Track pads	mm	900
Crawler drive speed	km/h	1.8

DIESEL ENGINE

Model	CATERPILLAR	C18 Tier 2	C18 Tier 4f
Max power	Hp / kW	765/571	755/563
Fuel tank capacity	litres	810	810

AUXILIARY WINCH

Max line-pull 1st layer	kN	70
-------------------------	----	----

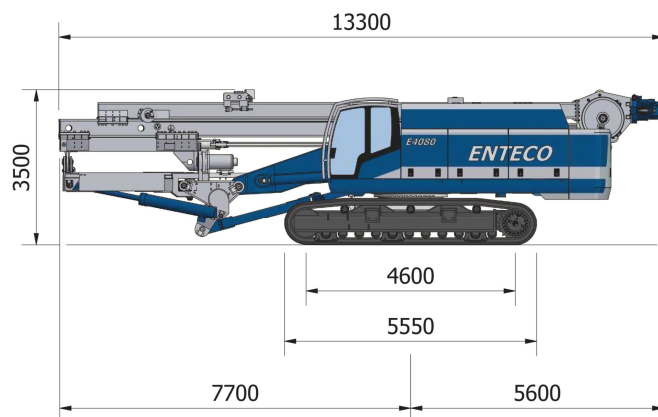

Via Kennedy, 16 - 30024 Musile di Piave - VENEZIA - ITALIA

Tel +39 0421 67.99.77 - Fax +39 0421 67.99.93 - e-mail: info@entecodrill.com - www.entecodrill.com

E4080 - SP180 116Q-015 2019018